


## GT2750/2750C

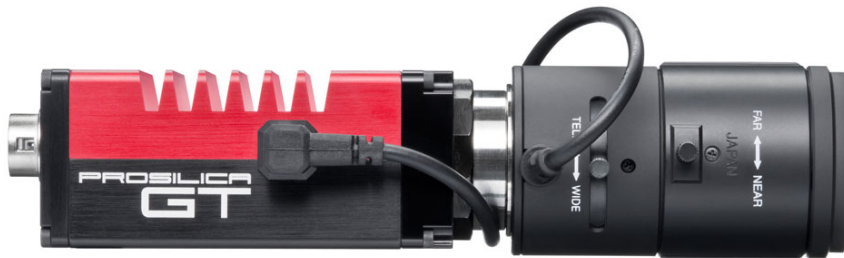

### Description

#### 6 Megapixel CCD camera for extreme environments - EXview sensor


The Prosilica GT2750 is a 6 Megapixel camera with a Gigabit Ethernet interface (GigE Vision®). The GT2750 is a rugged camera designed to operate in extreme environments and fluctuating lighting conditions. It offers Precise iris lens control allowing users to fix the aperture size to optimize depth of field, exposure and gain without the need for additional control elements. The GT2750 incorporates the new Sony ICX694 CCD sensor. Sony brings its EXview HAD technology previously utilized on lower resolution sensors such as the ICX285 to newer devices like the ICX694 adding higher resolution and fast frame rates to the technology's existing benefits, which include high sensitivity, near IR response, low noise, anti-blooming and excellent image quality.

- Sony ICX694 EXview HAD CCD sensor
- Auto Iris (P-Iris and DC)
- Power over Ethernet (PoE)
- Ethernet surge suppression
- Gamma, color correction
- Metadata (Chunk data), clock synchronization (IEEE1588)
- Wide operating temperature range
- Global shutter (digital shutter)
- Camera and sensor temperature monitoring
- **Models:**
  - GT2750, 2750 x 2200, 19 fps, CCD mono
  - GT2750C, 2750 x 2200, 19 fps, CCD color

## Specifications

| Prosilica GT 2750                      |  |
|--|--|
| Interface                              | IEEE 802.3 1000BASE-T, IEEE 802.3af (PoE)                  |
| Resolution                             | 2750 x 2200  |
| Sensor                                 | Sony ICX694  |
| Sensor type                            | CCD Progressive  |
| Sensor size                            | Type 1   |
| Cell size                              | 4.54 $\mu$ m   |
| Lens mount                             | C (adjustable)   |
| Max frame rate at full resolution      | 19.8 fps   |
| A/D                                    | 14 bit   |
| On-board FIFO                          | 128 MB   |
| Output                                 |  |
| Bit depth                              | 14 (mono) - 12 (color) bit                                 |
| Mono modes                             | Mono8, Mono12, Mono12Packed, Mono14                        |
| Color modes YUV                        | YUV411Packed, YUV422Packed                                 |
| Color modes RGB                        | RGB8Packed, BGR8Packed, RGBA8Packed, BGRA8Packed           |
| Raw modes                              | BayerGR8, BayerGR12, BayerGR12Packed                       |
| General purpose inputs/outputs (GPIOs) |  |
| TTL I/Os                               | 1 input, 2 outputs   |
| Opto-coupled I/Os                      | 1 input, 2 outputs   |
| RS-232                                 | 1  |
| Operating conditions/Dimensions        |  |
| Operating temperature                  | -20°C ... +60°C  |
| Power requirements (DC)                | PoE, or 7-25 VDC   |
| Power consumption (12 V)               | 5.4 W @12 VDC  |
| Mass                                   | 224 g  |
| Body Dimensions (L x W x H in mm)      | 92 x 53.3 x 33 (including connectors, w/o tripod and lens) |
| Regulations                            | CE, FCC Class A, RoHS (2011/65/EU)                         |

[Download Prosilica GT2750 Technical drawing](#)

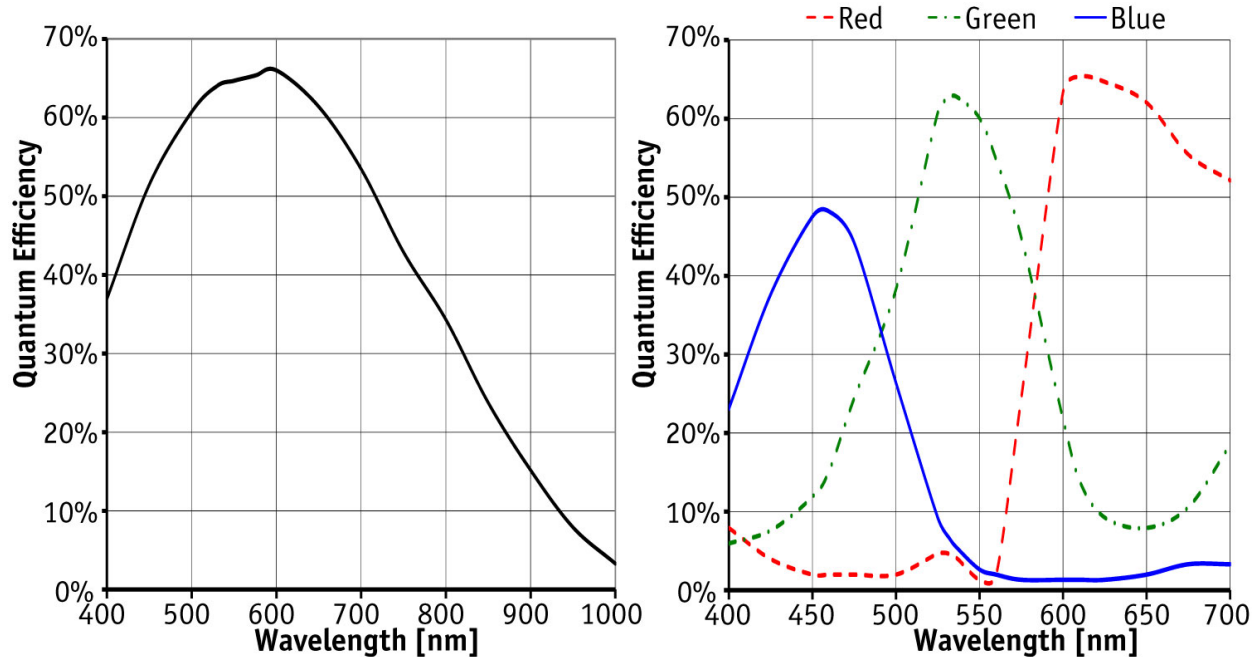

## Smart features

The Prosilica GT2750 features include:

- Auto exposure
- Auto gain
- Auto white balance
- Flexible binning
- Region of Interest (ROI) readout
- DSP subregion (selectable ROI for auto features)
- StreamBytesPerSecond (easy bandwidth control)
- Stream hold
- Asynchronous external trigger and sync I/O
- Auto Iris (P-Iris and DC)
- Power over Ethernet (PoE)
- Ethernet surge suppression
- Gamma
- Color correction
- Metadata (Chunk data)
- Clock synchronization (IEEE1588)
- Recorder and multiframe acquisition modes
- Camera and sensor temperature monitoring

## White Paper

[Remote lens control with Prosilica GT cameras](#)

## Applications

The Prosilica GT2750 is ideal for a wide range of applications including:

- Outdoor imaging
- Traffic imaging / ITS
- Public security and surveillance
- Industrial inspection
- Machine vision
- Military and space applications