


UI-3580ML-C-HQ



Specification

Sensor

Sensor type	CMOS Color
Shutter	Rolling shutter / Global Start Shutter
Sensor characteristic	Linear
Readout mode	Progressive scan
Pixel Class	QSXGA
Resolution	4.92 Mpix
Resolution (h x v)	2560 x 1920 Pixel
Aspect ratio	4:3
ADC	12 bit
Color depth (camera)	12 bit
Sensor Size	1/2"
Optical Size	5.632 mm x 4.224 mm
Optical sensor diagonal	7.04 mm (1/2.27")
Pixel size	2.2 µm
Manufacturer	Aptina
Sensor Model	MT9P006STC
Gain (master/RGB)	12.2x/5.8x
AOI horizontal	increased frame rate
AOI vertical	increased frame rate
AOI image width / step width	32 / 4
AOI image height / step width	4 / 2
AOI position grid (horizontal/vertical)	4 / 2
Binning horizontal	increased frame rate
Binning vertical	increased frame rate
Binning method	Color
Binning factor	2 / 3 / 4 / 6
Subsampling horizontal	increased frame rate
Subsampling vertical	increased frame rate
Subsampling method	Color
Subsampling factor	2, 3, 4, 5, 6, 8

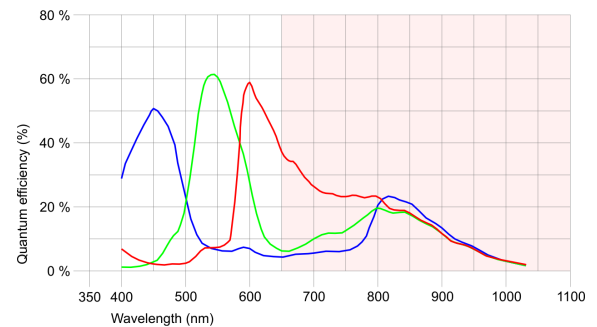

UI-3580ML-C-HQ

Model

Pixel clock range	5 MHz - 104 MHz
Frame rate freerun mode	15.2 fps
Frame rate trigger	15.2 fps
Exposure time (minimum - maximum)	0.031 ms - 3404 ms
Power consumption	1.4 W - 1.7 W

Ambient conditions


Ambient temperature	0 °C - 40 °C / 32 °F - 104 °F
Storage temperature	-20 °C - 60 °C / -4 °F - 140 °F
Relative humidity	20 % - 80 %

Connectors

Interface connector	USB 3.0 micro-B, screwable
I/O connector	8-pin Hirose connector (HR25-7TR-8PA(73))
Power supply	USB cable

Pin assignment I/O connector


1	Ground (GND)
2	Flash output with optocoupler (-)
3	General Purpose I/O (GPIO) 1
4	Trigger input with optocoupler (-)
5	Flash output with optocoupler (+)
6	General Purpose I/O (GPIO) 2
7	Trigger input with optocoupler (+)
8	Output supply voltage, 5 V (100 mA)



Design

Lens Mount	CS- / C-Mount
IP code	IP30
Dimensions H/W/L	47.0 mm x 46.0 mm x 28.0 mm
Mass	41 g

UI-3580ML-C-HQ

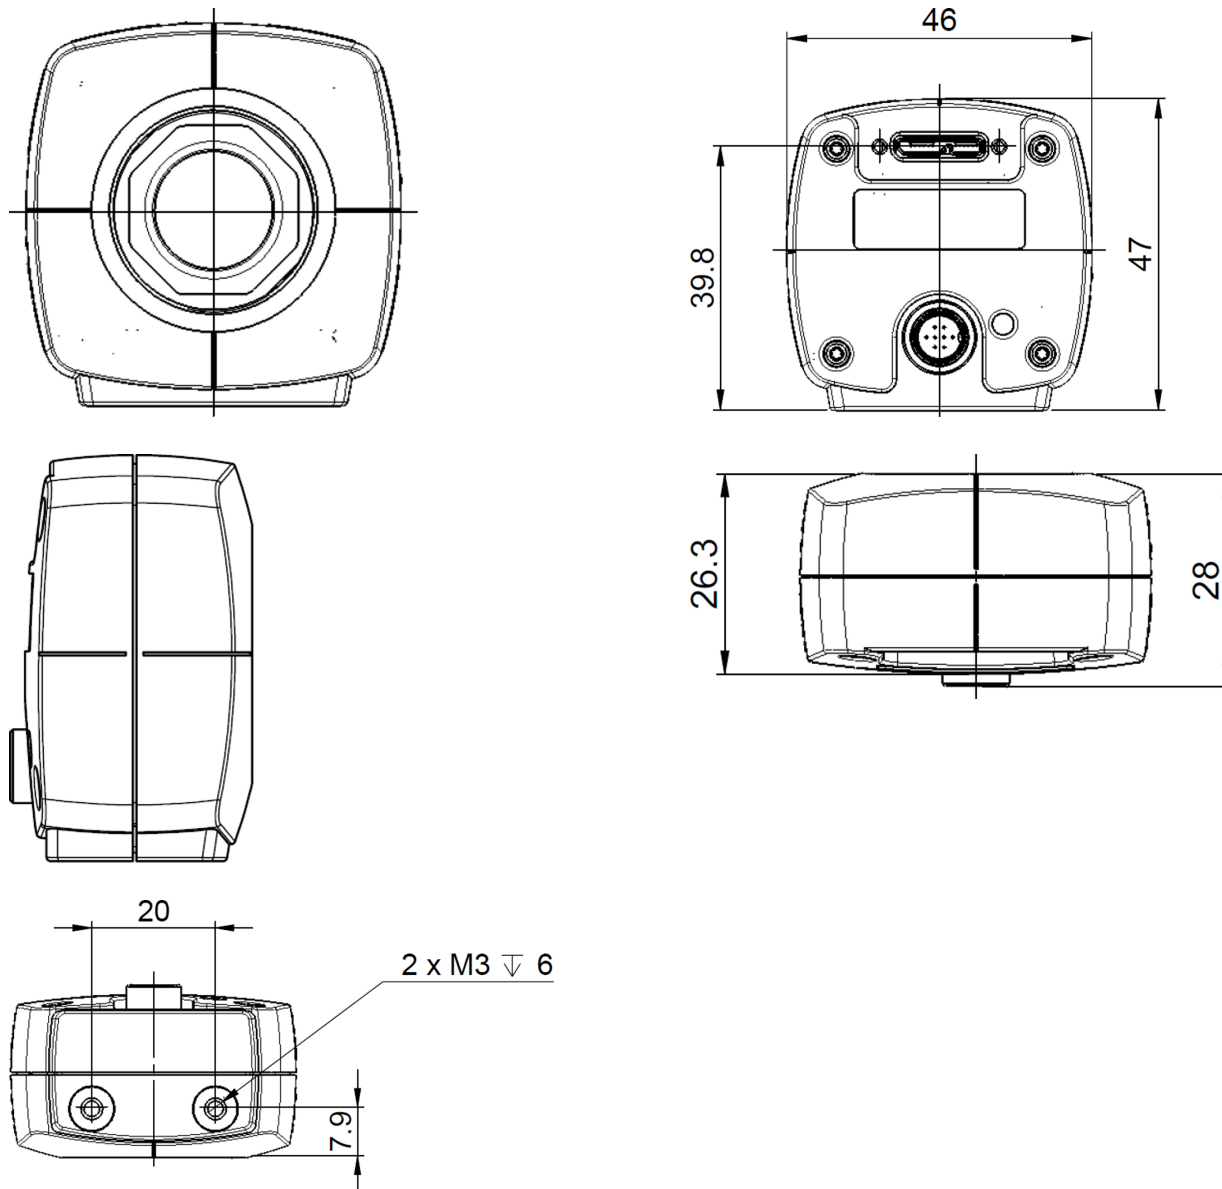

Subject to technical modifications

Page 3 of 3

www.ids-imaging.com

IDS Imaging Development Systems GmbH

Dimbacher Straße 6 - 8 · 74182 Obersulm · Phone +49 7134 96196-0 · Fax +49 7134 96196-99 · E-Mail info@ids-imaging.de