

Marlin – Your entrance into the world of digital cameras.



Description

The AVT Marlin F-080B (b/w) and AVT Marlin F-080C (color) are very compact, space saving IEEE 1394 XGA C(CS)-Mount cameras, equipped with a highly sensitive SONY type 1/3 progressive CCD sensor. The camera offers an external asynchronous trigger shutter and operates in 8-bit or 10-bit mode. At full image resolution, the AVT Marlin F-080B/C offers up to 20 fps (**optional 30 fps**) and is thus particularly suited for use in industrial image processing and product automation.


The extensive built-in image processing possibilities (image pre-processing) result in outstanding image quality, reduced retouching, less load on the system and higher performance overall. The integrated smart functions take over essential functions of the frame grabber, which is compensated by use of the Marlin.

The Marlin can be easily integrated into existing applications thanks to its powerful and flexible API.


Highlights

- > XGA (1032 x 778) progressive CCD
- Up to 20 fps / **optional with up to 30 fps**
- True partial scan (higher frame rates by smaller AOI)
- Format_7 support (flexible AOI, flexible speed)
- Optocoupled asynchronous image trigger
- Image pre-processing features:
 - Auto controlled gain, exposure, white balance
 - Color correction, hue, saturation (color only)
 - Real-time shading correction
 - Programmable LUT
 - And lots more ...
- Smart frame grabber features:
 - Image FIFO memory (7 full frames)
 - Image mirror
 - Single-shot, multi-shot, free-run
 - 2 programmable inputs
 - 2 programmable outputs
 - and lots more ...
- Very good image quality, natural color response
- Very high frame rate
- Super compact size
- C-Mount / CS-Mount
- Angled head and customized housings

Sensor Specification b/w

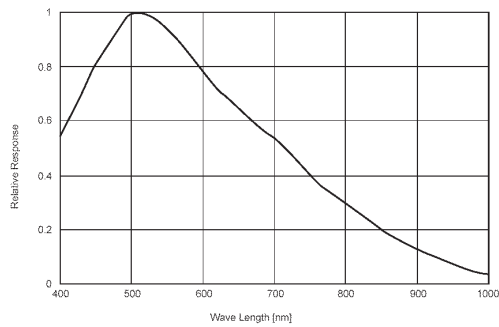


Sensor Specification color

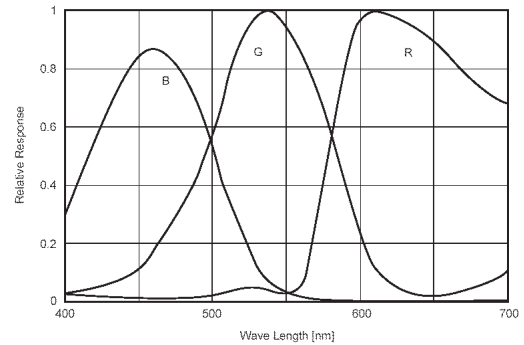

The sensor specifications (excluding lens and filter) are typical for this camera model.

Dimensions

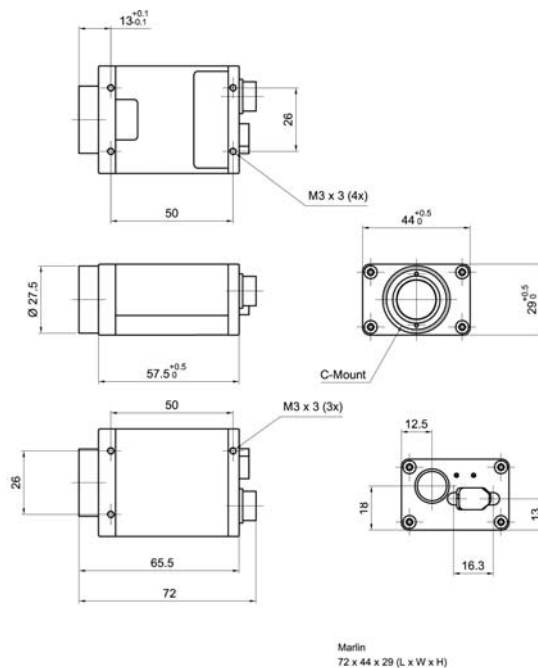


Connections



Front view



Marlin F-080B/C		Marlin F-080B/C-30 fps		I/O Connector	
AOI height / pixel	Frame rate / fps	AOI height / pixel	Frame rate / fps	Pin	Signal
778	20.0	778	30.2	1	External GND
768	20.3	768	30.5	2	CCD models only: Ext. Power (8...36V DC)
600	25.0	600	37.7	3	
480	30.0	480	45.2	4	GP Input 1 (Default: Trigger)
240	49.8	240	75.4	5	
120	73.3	120	113.1	6	GP Output 1 (Default: IntEna)
60	99.2	60	150.8	7	GP Input GND
Format_7 Raw8/Mono8		Format_7 Raw8/Mono8		8	RxD (RS232)
				9	TxD (RS232)
				10	GP Output Power (max. 36 V DC)
				11	GP Input 2 (Default: -)
				12	GP Output 2 (Default: -)



Camera specifications	Marlin F-080B (b/c)	Marlin F-080C (color)
Image device	Type 1/3 (diag. 6 mm) progressive scan SONY CCD ICX204AL/AK	
Picture size	1024 x 768 pixel (Format_1); supporting all smaller fixed formats; up to 1032 x 778 pixel (Format_7 Mode_0)	
Cell size	4.65 µm x 4.65 µm	
Resolution depth	8 bit / 10 bit (b/w only); 12 bit (ADC)	
Lens mount	C-Mount; CS-Mount on demand	
Digital interface	IEEE 1394 IIDC v. 1.3	
Transfer rate	100 Mbit/s, 200 Mbit/s, 400 Mbit/s	
Frame rates	Up to 20 Hz in Format_7 optional: up to 30 Hz (Format_7) up to 20/30 Hz in Format_7 Raw8; 20/27 Hz (YUV 4:1:1); 20/20 Hz (YUV 4:2:2); 13Hz (RGB8)	
Gain control	Manual: 0-24 dB (0.035 dB/step); auto gain (select. AOI)	
Shutter speed	50 µs (F080-30: 37 µs) ... ~ 67 s; auto shutter (select. AOI)	
External trigger shutter	Trigger_Mode_0, Trigger_Mode_1, advanced feature: Trigger_Mode_15 (bulk); image transfer by command; trigger delay	
Smart features	Real-time shading correction; image sequencing; built in FIFO memory up to 7 frames; one user programmable look-up table; 2 configurable inputs, 2 configurable outputs; image mirror (L-R<->R-L), binning, secure image signature (SIS), user profiles, serial port (IIDC V1.3)	
Power requirements	DC 8 V – 36 V via IEEE 1394 cable or 12-pin HIROSE	
Power consumption	Less than 3 watt (@ 12 V DC)	
Dimensions	72 mm x 44 mm x 29 mm (L x W x H); w/o tripod and lens	
Mass	<120 g (without lens)	
Operating temperature	+ 5 ... + 45° Celsius	
Storage temperature	- 10 ... + 60 ° Celsius	
Regulations	CE, FCC Class B, RoHS (2002/95/EC)	
Options	Removable IR cut filter; host adapter card, locking IEEE 1394 cable, AVT FirePackage / Active FirePackage / Fire4Linux	

Design and specifications of the described product(s) are subject to change without notice.
© 06/2009