


[SPECIFICATIONS] 20x Day&Night Motorized Zoom Lens Mounting "ED-Glass" Image Size: (1/2) (1/3) (1/4)

Focal Length :	8-160mm	Photometry Range :	Approx. 40% - 70% Variable to Vp-p
Maximum Relative Aperture :	1:1.6	Input Impedance :	High Impedance
Iris :	F1.6 - Approx. 1,000 (With ND Spot Filter)	Operation : Zoom :	Motorized(DC+/-6.4V, Max40mA)Speed Approx. 6sec.
Zoom Ratio :	20X	Focus :	Motorized(DC+/-6.4V, Max40mA)Speed Approx. 7sec.
Sensitivity Adjustment :	0.5 - 1.0Vp-p(Image Signal)	Iris :	EE (DC+8.5 to 16V : Fixed Voltage, Max60mA) Speed Within 3.5sec.
Angular Field of View :	42.7 X32.7deg. at 8mm 2.3X 1.7deg. at 160mm	EE Mechanism :	The built-in EE Amp amplifies the difference between the video signal from the camera and the preset Iris signal level. It causes the Iris to change size.
Image Format :	6.4 X 4.8mm(D8mm)	EE Accuracy :	With Input Video Signal 0.7Vp-p Within +/-15% of Mean Value
Minimum Object Distance :	1.5m(From Front Vertex)	Operation Temperature :	-10 to +50
Object Dimensions at M.O.D. :	1,099X829mm at 8mm 57X 43mm at 160mm	Mount :	C-Mount(Adjustable Lens Position)
Optical Back Focal Distance :	14.06mm(In Air)	Front Thread :	62mm P0.75
Flange Back :	17.526mm	Size, Weight :	95.5X84X152.5mm, Approx. 1,400g
Input Signal :	Composite Video Signal or Video Signal		

- [COMPOSITION]
- Lens1
 - Lens Cap1
 - Dust Cap1

[DIMENSIONS]

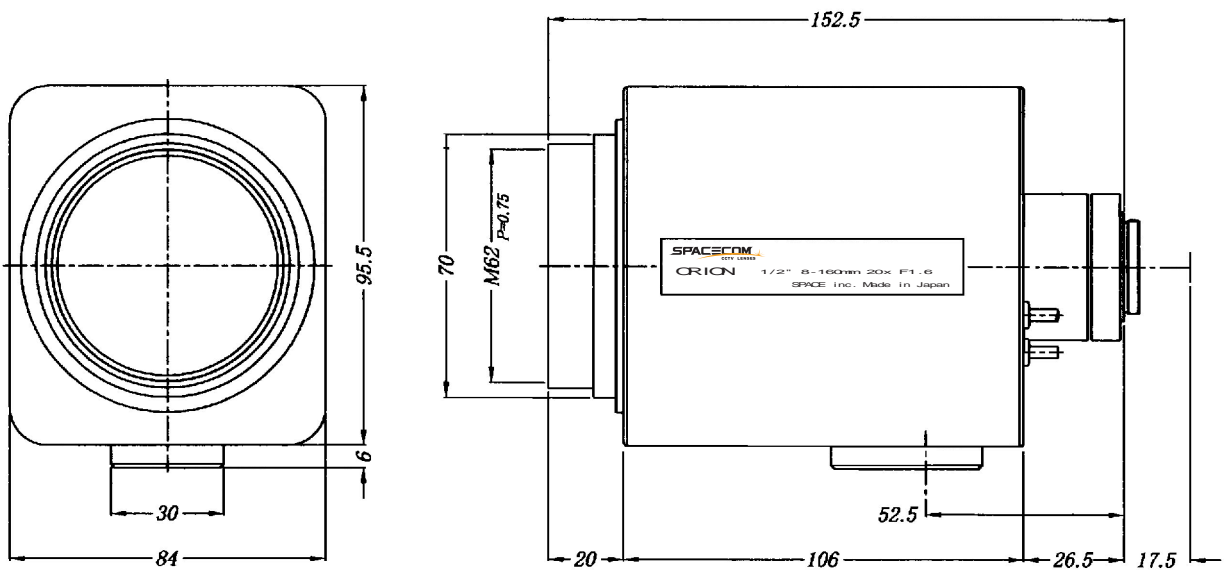

[CIRCUIT DIAGRAM]

