




**iDS**

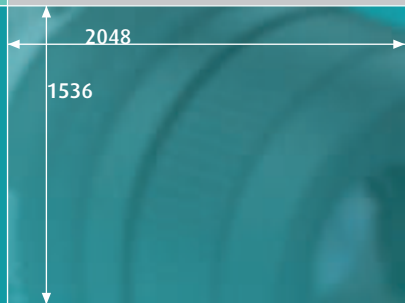

**GigE uEye<sup>®</sup> UI-5460SE-C**

**3.2 Megapixels SUXGA Camera with 1/2" CMOS Sensor**

# GigE uEye® SE UI-5460SE-C



## The characteristics at a glance

Gigabit Ethernet  
CMOS  
UI-5460SE-C  
-

2048 x 1536  
SUXGA/3,2 MP

1/2"  
Rolling

12 fps

10,8 fps

53 µs - 2,91 s  
53 µs - 1,25 ms

H<sup>2</sup> + V<sup>2</sup>  
86 fps

H<sup>2</sup> + V<sup>2</sup>  
x2 - x8  
1024 x 768, 44 fps  
512 x 384, 153 fps

H<sup>2</sup> + V<sup>2</sup>  
H: Sum  
V: Average

x2, x3, x4, x6  
1024 x 768, 35 fps  
512 x 384, 71 fps

-  
7,25x/12x  
2x


MT9T001  
3 - 46 (59) MHz

3,2  
20.000 e-  
6,55 x 4,92 mm

4:3  
8,2 mm, 1/2,0"


² = Use increases frame rate

\* = in preparation

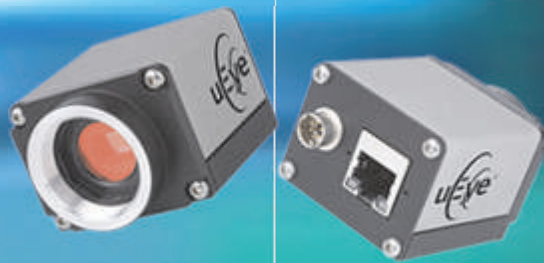


## The GigE uEye® SE family

The GigE uEye® SE extends the broad range of uEye® industrial cameras by very compact models with Gigabit Ethernet interface, specially tailored to the needs of plant and machinery manufacturers. The bandwidth is 2.5 times higher than with USB and cable lengths up to 100 m are possible.



Sensor characteristics

UI-5460SE-C

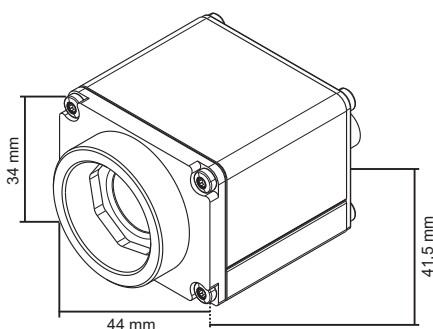

Dimensions GigE uEye SE CMOS-Model

Interface  
Sensor Technology  
Model description (color)  
Model description (Mono)  
Resolution (h x v)  
Resolution Category / Pixel Class

Sensor size  
Shutter  
max. fps in Freerun Mode at full resolution  
max. fps in SW Trigger Mode at 1 ms exposure

Exposuretime in Freerun Mode  
Exposuretime in Trigger Mode

AOI Modes  
AOI with 640 x 480 Pixels

Subsampling Modes  
Subsampling Factors  
Resolution, fps, e. g.

Binning Modes  
Binning Method

Binning Factors  
Resolution, fps, e. g.

Mono: Maximum Gain  
Color: Maximum Gain RGB/Master  
Additional Gain Boost with Factor

Sensor Model  
Pixel Clock

Pixelpitch in µm  
Full Well Capacity  
Optical Size  
Aspect Ratio  
Exact Real Diagonal

In scope of delivery:

Powerful, easy to handle uEye SDK  
uEye Demo and Programexamples executable and Source Code.  
uEye Camera Manager  
TWAIN, Active-X and Direct Show (WDM) drivers  
Interfaces for Activision Tools, Common Vision Blox, HALCON, LabVIEW and Neurocheck  
GeniCam™ Interface

Driver for Windows 2000, XP, VISTA and Linux\*