




**iDS**

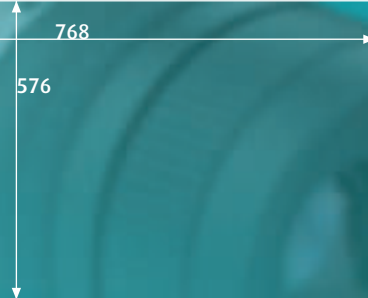

GigE uEye<sup>®</sup> UI-6220SE-C/M

CCIR Camera with 1/2" CCD Sensor

# GigE uEye® SE UI-6220SE-M / UI-6220SE-C



## The characteristics at a glance

Gigabit Ethernet  
 CCD (Sony)  
 UI-6220SE-C  
 UI-6220SE-M

Interface  
 Sensor Technology  
 Model description (color)  
 Model description (Mono)  
 Resolution (h x v)  
 Resolution Category / Pixel Class

768 x 576  
 CCIR

Sensor size  
 Shutter

1/2"  
 Global

max. fps in Freerun Mode at full resolution  
 max. fps in SW Trigger Mode at 1 ms exposure

52 fps  
 47 fps

Exposuretime in Freerun Mode  
 Exposuretime in Trigger Mode

50 µs - 770 ms  
 50 µs - 10 min

AOI Modes  
 AOI with 320 x 240 Pixels (CIF)

H + V²  
 97 fps

Subsampling Modes  
 Subsampling Factors  
 Resolution, fps

-  
 -  
 -

Binning Modes  
 Binning Method

H + V² (Mono)  
 H + V: Additiv

Binning Factors  
 Resolution, fps

x2, x3, x4  
 384 x 288, 90 fps  
 256 x 192, 121 fps  
 192 x 144, 143 fps  
 14x  
 4x /8,9x  
 2x (Mono)

Mono: Maximum Gain  
 Color: Maximum Gain RGB/Master  
 Additional Gain Boost with Factor

Sensor Model  
 Pixel Clock

ICX415  
 5 - 30 MHz

Pixelpitch in µm  
 Full Well Capacity  
 Optical Size  
 Aspect Ratio  
 Exact Real Diagonal

8,3  
 25.000 e-  
 6,37 x 4,78 mm  
 4:3  
 8,0 mm, 1/2,0"

In scope of delivery:

Powerful, easy to handle uEye SDK  
 uEye Demo and Programexamples executable and Source Code.  
 uEye Camera Manager  
 TWAIN, Active-X and Direct Show (WDM) drivers  
 Interfaces for Activision Tools, Common Vision Blox, HALCON, LabVIEW and Neurocheck  
 GenICam™ Interface


² = Use increases frame rate  
 \* = in preparation

Driver for Windows 2000, XP, VISTA and Linux\*




## The GigE uEye® SE family

The GigE uEye® SE extends the broad range of uEye® industrial cameras by very compact models with Gigabit Ethernet interface, specially tailored to the needs of plant and machinery manufacturers. The bandwidth is 2.5 times higher than with USB and cable lengths up to 100 m are possible.

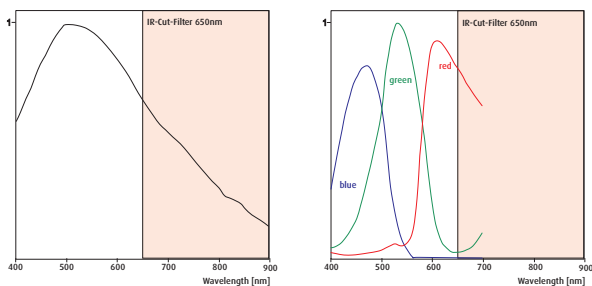

Sensor Characteristics UI-6220SE-M

UI-6220SE-C

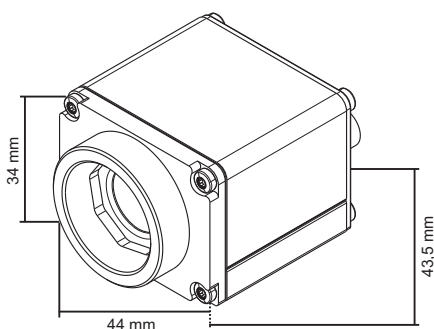

Dimensions GigE uEye SE CCD-Model

