




iDS

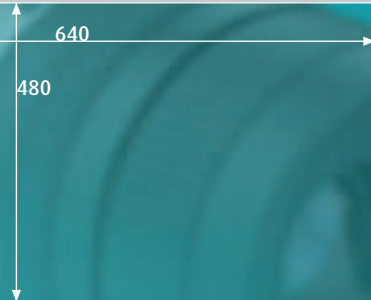

GigE uEye[®] UI-6410SE-C/M

VGA Camera with 1/3" CCD Sensor

GigE uEye® SE UI-6410SE-M / UI-6410SE-C



The characteristics at a glance

Gigabit Ethernet
 CCD (Sony)
 UI-6410SE-C
 UI-6410SE-M

Interface
 Sensor Technology
 Model description (color)
 Model description (Mono)
 Resolution (h x v)
 Resolution Category / Pixel Class

640 x 480
 VGA

Sensor size
 Shutter

1/3"
 Global

max. fps in Freerun Mode at full resolution
 max. fps in SW Trigger Mode at 1 ms exposure

75 fps
 64 fps

Exposuretime in Freerun Mode
 Exposuretime in Trigger Mode

40 µs - 640 ms
 40 µs - 10 min

AOI Modes
 AOI with 320 x 240 Pixels (CIF)

H + V²
 111 fps

Subsampling Modes
 Subsampling Factors
 Resolution, fps

-
 -
 -

Binning Modes
 Binning Method

H + V² (Mono)
 H + V: Sum

Binning Factors
 Resolution, fps

x2, x3, x4
 320 x 240, 133 fps
 212 x 160, 178 fps
 160 x 120, 215 fps
 18x

Mono: Maximum Gain
 Color: Maximum Gain RGB/Master
 Additional Gain Boost with Factor

4x /12x
 2x (Mono)

Sensor Model
 Pixel Clock

ICX424
 5 - 30 MHz

Pixelpitch in µm
 Full Well Capacity
 Optical Size
 Aspect Ratio
 Exact Real Diagonal

7,4
 24.000 e-
 4,74 x 3,55 mm
 4:3
 5,9 mm, 1/2,7"

In scope of delivery:

Powerful, easy to handle uEye SDK
 uEye Demo and Programexamples
 executable and Source Code.
 uEye Camera Manager
 TWAIN, Active-X and Direct Show
 (WDM) drivers
 Interfaces for Activision Tools,
 Common Vision Blox, HALCON,
 LabVIEW and Neurocheck
 GeniCam™ Interface


² = Use increases frame rate
 * = in preparation

Driver for Windows 2000, XP, VISTA
 and Linux*




The GigE uEye® SE family

The GigE uEye® SE extends the broad range of uEye® industrial cameras by very compact models with Gigabit Ethernet interface, specially tailored to the needs of plant and machinery manufacturers. The bandwidth is 2.5 times higher than with USB and cable lengths up to 100 m are possible.

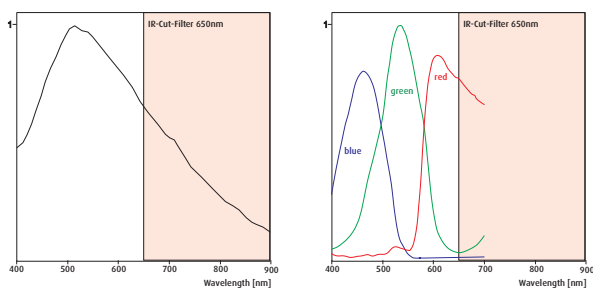

Sensor Characteristics UI-6410SE-M

UI-6410SE-C

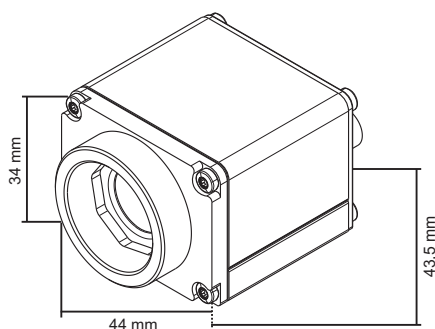

Dimensions GigE uEye SE CCD-Model

