

10-350mm1:1.5

Image Size:  $\frac{1}{2}$   $\frac{1}{3}$


[SPECIFICATIONS] 35x F1.5 Motorized Zoom Lens

Focal Length :	10-350mm	Photometry Range :	Approx. 40% - 70% Variable to Vp-p
Maximum Relative Aperture :	1:1.5	Input Impedance :	High Impedance
Iris :	F1.5 - Approx. 1,000 (With ND Spot Filter)	Operation : Zoom :	Motorized (DC6~12V, Max60mA)
Zoom Ratio :	35X	Focus :	Motorized (DC6~12V, Max60mA)
Sensitivity Adjustment :	0.5 - 1.0Vp-p (Image Signal)	Iris :	EE (DC+8 to 16V : Fixed Voltage, Max60mA)
Angular Field of View :	35.3X26.7deg. at 10mm 1.05X0.79 deg. at 350mm	EE Mechanism :	The built-in EE Amp amplifies the difference between the video signal from the camera and the Iris signal level.
Image Format :	6.4X4.8mm (D8mm)	EE Accuracy :	With Input Video Signal 0.7Vp-p Within+/-10% of Mean Value
Minimum Object Distance :	2.5m (From Front Vertex)	Operation Temperature :	-10 to +50 deg.
Optical Back Focal Distance :	14.48mm (In Air)	Mount :	C-Mount (Adjustable Lens Position)
Flange Back :	17.526mm (In Air)	Front Thread :	86mm P1.0
Input Signal :	Composite Video Signal or Video Signal	Size, Weight :	112X100X238.5mm, Approx. 1,950g

[COMPOSITION]

- Lens . . . . .1
- Lens Cap . . . . .1
- Dust Cap . . . . .1

[DIMENSIONS]

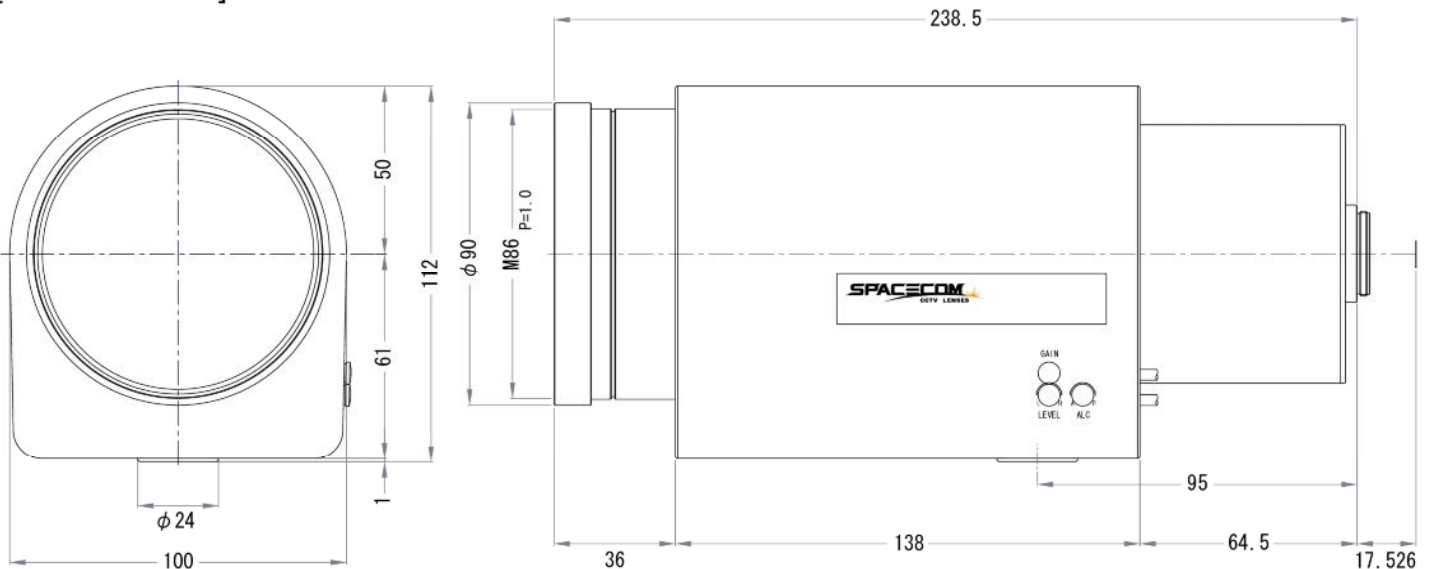

[CIRCUIT DIAGRAM]

