


UI-5360CP-M-GL



Specification

Sensor

Sensor type	CMOS Mono
Shutter	Global Shutter
Sensor characteristic	Linear with knee points
Readout mode	Progressive scan
Pixel Class	2 MP
Resolution	2.23 Mpix
Resolution (h x v)	2048 x 1088 Pixel
Aspect ratio	17:9
ADC	12 bit
Color depth (camera)	12 bit
Sensor Size	2/3"
Optical Size	11.264 mm x 5.984 mm
Optical sensor diagonal	12.75 mm (1/1.25")
Pixel size	5.5 µm
Manufacturer	CMOSIS
Sensor Model	CMV2000-3E5M1PP
Gain (master/RGB)	4x/-
AOI horizontal	same frame rate
AOI vertical	increased frame rate
AOI image width / step width	16 / 4
AOI image height / step width	48 / 2
AOI position grid (horizontal/vertical)	2 / 2
Binning horizontal	-
Binning vertical	-
Binning method	-
Binning factor	-
Subsampling horizontal	same frame rate
Subsampling vertical	increased frame rate
Subsampling method	M/C automatic
Subsampling factor	2, 4, 6, 8

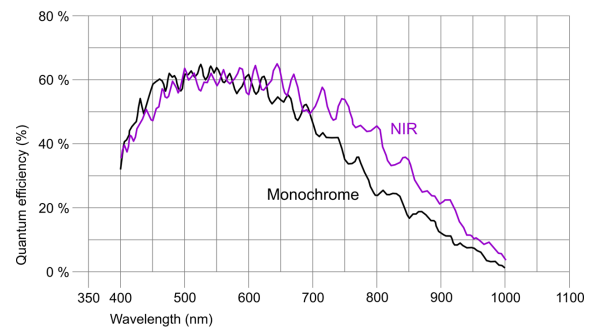

UI-5360CP-M-GL

Model

Pixel clock range	38 MHz - 84 MHz
Frame rate freerun mode	36.0 fps
Frame rate trigger	36.0 fps
Exposure time (minimum - maximum)	0.040 ms - 500 ms
Power consumption	1.8 W - 2.6 W
Special features	Overlap trigger, Dual exposure, Sensor source gain, Multi-AOI

Ambient conditions


Ambient temperature	0 °C - 40 °C / 32 °F - 104 °F
Storage temperature	-20 °C - 60 °C / -4 °F - 140 °F
Relative humidity	20 % - 80 %

Connectors

Interface connector	GigE RJ45, screwable
I/O connector	6-pin Hirose connector (HR10A-7R-6PB)
Power supply	12 V - 24 V or PoE

Pin assignment I/O connector

1	Ground (GND)
2	Power supply (VCC) 12-24 V
3	Trigger input with optocoupler (-)
4	Trigger input with optocoupler (+)
5	Flash output with optocoupler (+)
6	Flash output with optocoupler (-)



Design

Lens Mount	C-Mount
IP code	IP30
Dimensions H/W/L	29.0 mm x 29.0 mm x 40.5 mm
Mass	61 g